




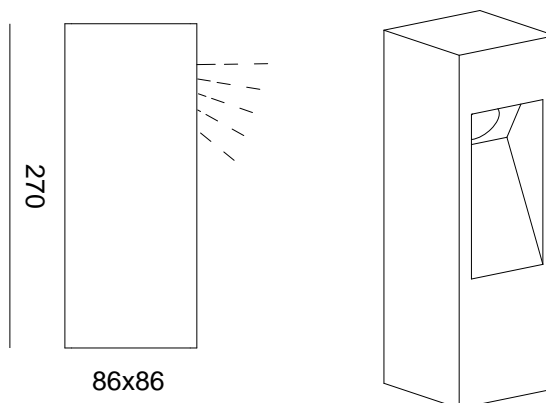
article P128 palo/ bollard



specifiche tecniche/ Technical data

- **tipologia/ type**
pali/ bollard
- **ambiente/ environment**
outdoor
- **Certificazione/ certification**
EN CE    IP65
- **volume**
0,002 m3
- **peso netto/ nett wight**
1,8kg
- **tensione/ voltage**
230v
- **fonte luminosa/ light source**
P128C - **L** - 040 1 x 1,7w 130lm
3000°k driver included
P128C - **L** - 095 1 x 1,7w 130lm
3000°k driver included
P128C - **H** - 040 1 x 3,5w 270lm
3000°k driver included
P128C - **H** - 095 1 x 3,5w 270lm
3000°k driver included

P128XC - **L** - 040 1 x 1,7w 115lm
2700°k driver included
P128XC - **L** - 095 1 x 1,7w 115lm
2700°k driver included
P128XC - **H** - 040 1 x 3,5w 250lm
2700°k driver included
P128XC - **H** - 095 1 x 3,5w 250lm
2700°k driver included
- **materiali/ materials**
Terre colorate per esterno, diffusore in
pmma
Natural colour outdoor cloays, pmma
diffuser



finiture/ finishes

avaible chart 4 of the catalogue